

PNEUMATIC PUMPS



Fully submersible pumps, for many drainage or dewatering jobs on building sites, quarries, etc.


Will suffer no damage when working dry or totally submerged. Light and compact housing made of strong aluminium alloy. Easily handled by one man. Require very little maintenance, which consists mainly of periodic oiling and cleaning.

Warning: These pumps are not intended to be used in explosive atmosphere.

TECHNICAL DATA



TYPE	BN-30	BN-60
Working pressure	6-7 kg/cm ²	
Air consumption	3.2 m ³ /min.	
Weight	13.5 kg	13 kg
A Air inlet thread	3/4"	
B Discharge thread	2 1/2"	1 1/2"
C Air exhaust thread	1 1/2"	
D Max. width	270 mm	230 mm
h Min. working depth	80 mm	
H Max. height	375 mm	

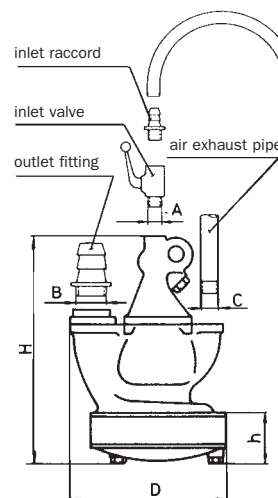

STANDARD ACCESSORIES

- Water outlet fitting
- Air exhaust pipe (350 mm)
- Inlet raccord

OPTIONAL ACCESSORIES

- Inlet valve
- Air line lubricator
- Silencer (1 1/2")
- Check-valve for the air exhaust (1 1/2" bore thread)

air line lubricator (3/4")
minimum capacity 0,5 l
minimum inner Ø
for hose: 19 mm